


## DURO-LAST® ROOF PAVERS

Duro-Last Roof Pavers are heavy-duty interlocking 24-inch by 24-inch pavers designed to protect a variety of roofing systems from damage due to excessive traffic and maintenance work. Featuring a half-inch thick top layer and half-inch thick bottom layer, Roof Pavers can also be used for rooftop patios, work areas, and other high-traffic spaces.



Available  
Colors:

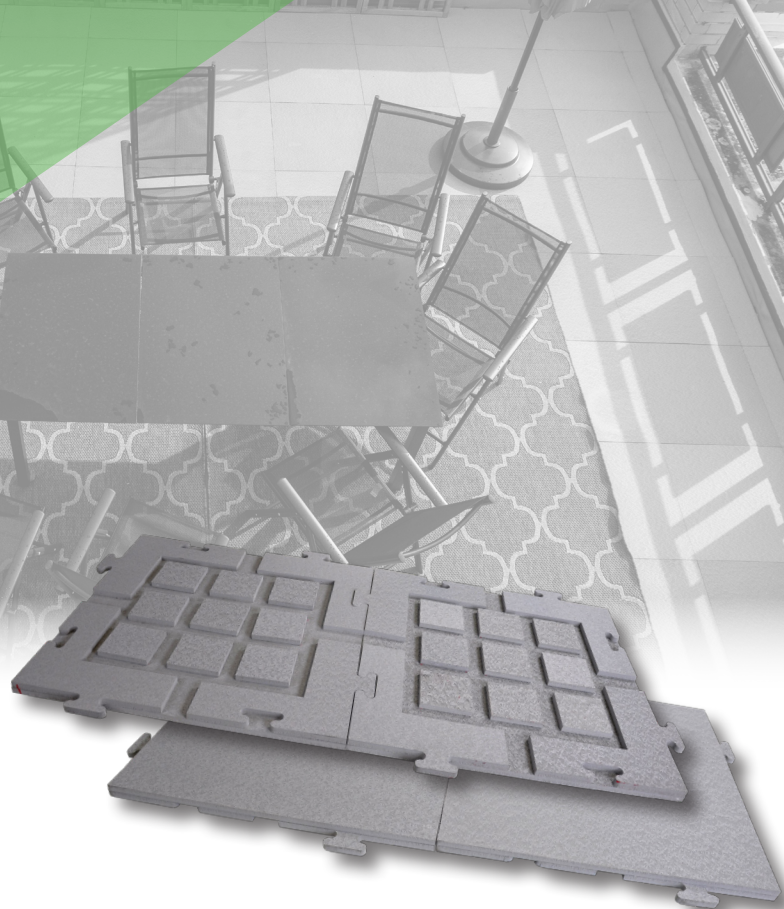

Light Gray



Tan



Terra Cotta



Loose lay easy installation with interlocking tabs



Bottom side features channels for water flow



Manufactured from 100% recycled vinyl



Resilient to hail impacts



Covered by a 2-Year Limited Warranty

DURO-LAST ROOF PAVERS PROPERTIES		
	Test Method	Results
Weight per Paver	–	16 lb.
Distributed Load	–	4 psf
Dimensions	–	24 in. x 24 in.
Thickness (Overall)	–	1 in.
Thickness (Top Layer)	–	0.5 in.
Thickness (Bottom Layer)	–	0.5 in.
Surface Friction (Wet and Dry)	ASTM E 303	Wet: 52 Dry: 85
Static Load	ASTM F 970	0.005 in.
Short-Term and Residual Indentation	ASTM F 1914	Short-Term: 14.46% Residual: 21.32%
Coefficient of Friction	ASTM D 2047	0.77
Fire Rating	ASTM E 108 (spread of flame) (3 <sup>rd</sup> party verification by Intertek)	Class A
Wind Uplift Resistance (Up to 110 mph)	ASTM D 3161	Class F



For more information give us a call or visit our website today.

**800-248-0280**  
**duro-last.com**

Duro-Last and the “World’s Best Roof” are registered trademarks owned by Duro-Last, Inc.  
Duro-Last Roof Paver Sell Sheet ORIG: 4.16.2020 - DL140052