

Most leaks in single-ply roofing systems are caused by imperfect seams and poor workmanship. The more seams that are done on the job site, the greater the potential for leaks down the road. The diagram below shows a typical 50,000-square-foot roof, pieced together from traditional rolled roofing membrane. This requires more than 7,500 linear feet of rooftop seaming to be performed. By comparison, less than 1,300 linear feet of seaming is required with the Duro-Last® Roofing System (as illustrated on the following page). Duro-Last also offers custom-fabricated rooftop accessories, such as curb flashings and scuppers, to address the most critical transition areas on your roof, an additional solution that is unique to the roofing industry.

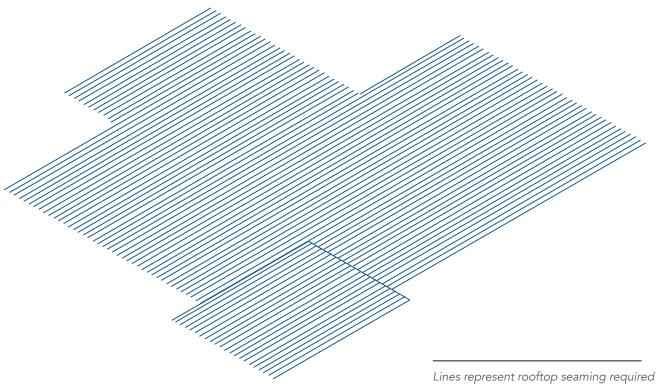

on a 50,000-square-foot building using a typical roll good roofing system.

The Advantages of Custom-Fabrication

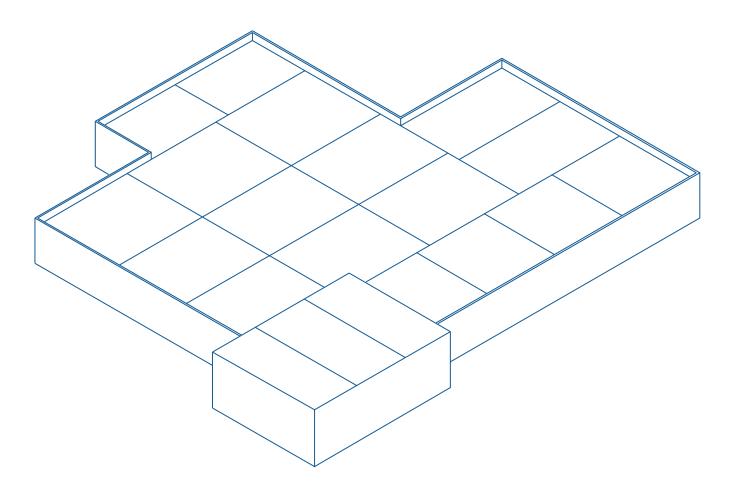

When you install a custom-fabricated Duro-Last Roofing System, up to 85 percent of the seams can be completed and inspected in our factory-controlled environment before the roofing system is delivered to the job site. By eliminating most of the on-site seaming, Duro-Last dramatically reduces the potential for leaks and adds the advantage of a faster, quieter and easier installation, with less maintenance, and reliable performance for years to come.


The Duro-Last® Roofing System:

It's as easy as it seams.



The Duro-Last Difference

All buildings are 50,000 square feet.

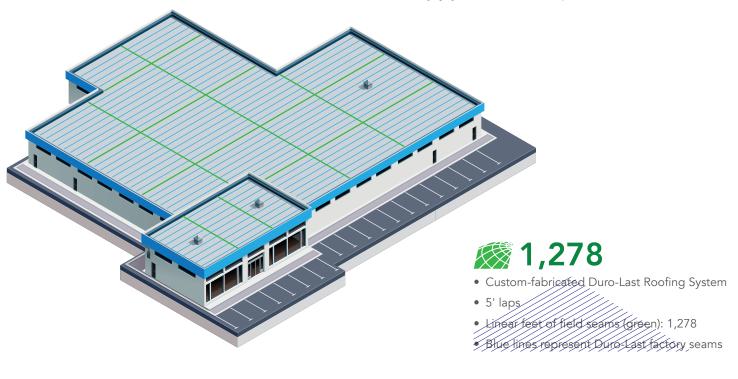



- 6' wide roll good systems
- Linear feet of field seams: 7,968



- 10' wide roll good systems
- Linear feet of field seams: 5,130

To learn more about Duro-Last Roofing Systems, contact us at:

(800) 248-0280

Duro-Last.com