


Duro-Light™ Skylight Series by Wasco®



High Performing, Light Diffusing Skylight with High Thermal Performance

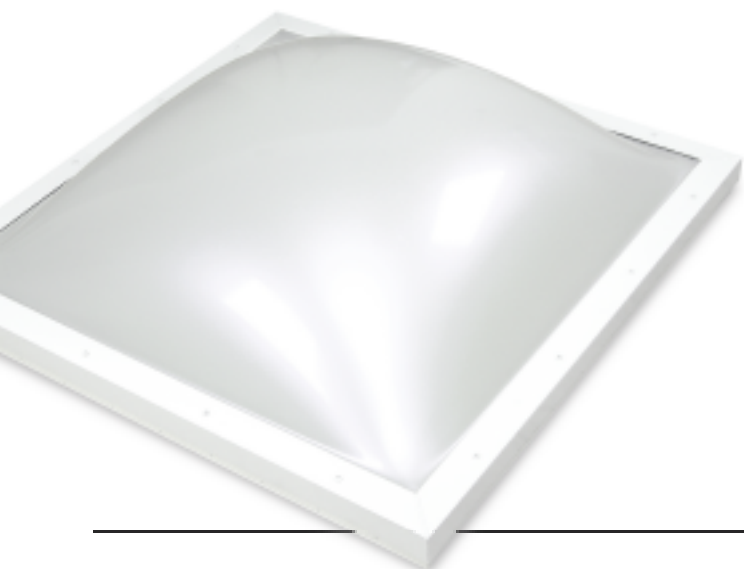

Duro-Last® introduces EcoSky³™, a revolutionary new, glare-free unit skylight that bathes the space in natural diffused light and provides high thermal performance.





By incorporating a 10mm Lumira™ aerogel panel with Acrylite® Satin Sky you get all the benefits of natural diffused light with high r-value. Plus our Satin Sky glazing is a powerful sun reflector which greatly reduces solar heat gain, making it ideal for both hot and cold climates. Duro-Last also offers Duro-Light without Lumira, which is perfect for warmer climates.

EcoSky³™ unit skylights with Lumira Aerogel:

- Meets IECC 2012 requirements in all climate zones!
- NFRC tested, rated and certified
- 100% haze – great light diffusion
- Utilizes an impact modified white acrylic outer dome with infrared blockers
- 10mm Lumira Aerogel filled Polycarbonate inner laylite (E3CS and E3CA models)
- Also available in standard thermalized unit skylights and Fall Protection series



Available configurations:

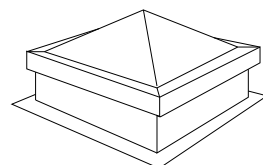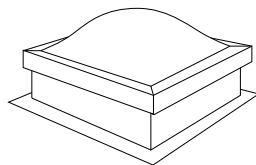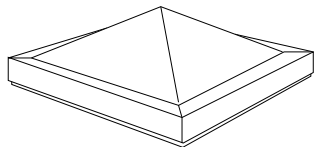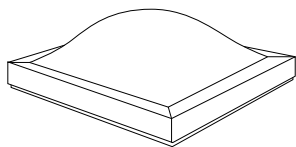

Curb-Mount

- For use on 1½" thick site-built or prefabricated curbs
- Available in dome or pyramid
- Available in standard sizes from 25¼" x 25¼" to 60½" x 92½" (O.D. of curb). Custom sizes available.

Deck-Mount

- Curb heights available in 9" or 12"
- Available in dome or pyramid
- Available in standard sizes from 22¼" x 22¼" to 57½" x 89½" (rough opening). Custom sizes available.

Optional Duro-Light™ Skylights:

Standard Unit Skylight

Available in thermoformed acrylic single or double domes or pyramids. Standard glazing color options include, clear, white and bronze.

Curb-Mount

- For use on 1½" thick site-built or prefabricated curbs
- Unit is fully assembled with corrosion proof screws and high performance weather seals
- Heat welded one-piece curb construction: heavy vinyl extruded curb with co-extruded weather seals, integral condensation gutter and counterflashing downward leg
- Aluminum extruded heliarc welded retainer frame
- Optional copper cladding available
- Available in standard sizes from 22¼" x 22¼" to 95½" x 95½" (O.D. of curb). Custom sizes available.

Deck-Mount

- Unit is fully assembled with corrosion proof screws and high performance weather seals
- Heavy vinyl extruded curb with co-extruded weather seals, integral condensation gutter and locking system for inner and outer skins of insulated aluminum curb
- Curb heights available in 9" or 12"
- Optional copper cladding available
- Aluminum curb and extruded retainer frame components have heliarc welded corners for long-term dependability
- Accessories include louvered vent slots
- Available in standard sizes from 22¼" x 22¼" to 92½" x 92½" (rough opening). Custom sizes available.

Thermalized Fall Protection

Sentinel Series Fall Protection units comply with OSHA Fall Protection Regulations.

- Engineered to resist a 775 ft. lb. impact without the use of metal grids or screens
- Available in both curb-mount and deck-mount configurations
- Sentinel Series units are provided with impact modified acrylic glazing in domes or pyramids. Standard glazing color options include clear, white and bronze
- Curb-Mount available in standard sizes from 22" x 22" to 95½" x 95½" (O.D. of curb). Deck-Mount available in standard sizes from 19" x 19" to 92½" x 92½" (rough opening). Custom sizes available.

Duro-Light™ Unit Skylights are proudly manufactured in the United States of America. "Duro-Last", and the "World's Best Roof" in the Duro-Last Globe are registered marks owned by Duro-Last Roofing, Inc. Acrylite® is a registered trademark of Evonik Industries. Lumira™ aerogel is a trademark of Cabot Corporation. Wasco® and EcoSky™ are a registered trademarks of Wasco Products, Inc.

Also Available:

Hurricane Resistant Glazing

- Provided with co-polyester to meet test requirements: ASTM-1886, ASTM-1996, TAS 201, 202 and 203
- Hurricane units model 52" x 96" or smaller can achieve a 75DP rating. Units larger than model 52" x 76" can achieve a 50DP rating
- Available in standard sizes from 25¼" x 25¼" to 49½" x 92½" (O.D. of curb). Custom sizes available.
- Available in curb-mount models, in clear or white glazing

Blast Resistant Glazing

- Provided with co-polyester to meet test requirements: ASTM-F1642-04, GSA-TS01-2003
- Available in standard sizes from 25¼" x 25¼" to 49½" x 81½" (O.D. of curb). Custom sizes available.
- Available in curb-mount models, in clear or white glazing



DURO-LAST
THE WORLD'S BEST ROOF.®

800-248-0280
www.duro-last.com



The Duro-Last Roofing System is proudly manufactured in the United States of America.

ENERGY STAR® is only valid in the United States.
Duro-Light Sheet 3/13 – 98002 / M#DL01-0049